


# PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS

I5PT-390IPX10  
I5PT-390IPX4



## Main Features:

- ONVIF
- Dual Video Stream
- H.264 Video Compression
- 50m IR Distance
- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- 250° Pan Rotation
- 65° Continuous Tilt
- 256 Preset Position
- 4 Pattern, Scan Route and 4 Cruise Lanes
- Park Action
- Fully function web-client
- 3D-DNR Noise Reduction
- Digital WDR
- IP66 Water-proof and Dust-proof
- Excellent High Resolution Picture Quality
- True Day/Night with ICR Filter
- Enhanced Noise Reduction
- WB/BLC/AGC

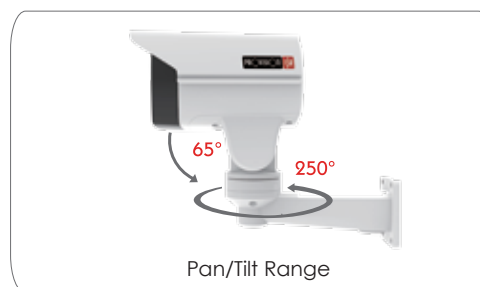

## Specifications

		I5PT-390IPX10	I5PT-390IPX4
Camera	Video	Model	I5PT-390IPX10 / I5PT-390IPX4
		Image Sensor	1/2.9" CMOS
		Effective Pixels	1920×1080
		Sync System	Progressive Scan
		Electronic Shutter	1/25s ~ 1/10000s
		Day & Night	ICR (Auto/Day/Night)
	Lens	Min. Illumination	0.05 Lux (Color), 0.01 Lux (B&W), 0 Lux (IR On)
		S/N Ratio	>52dB
		Optical Zoom	x10 (5.1-51mm) / x4 (2.8-12mm)
		Digital Zoom	No
Audio	Focus	Auto / Manual	
	Minimum Focus Distance	1.5m	
Image Enhancement	Horizontal Angle of View	H: 50.4°(Wide) to 5.4°(Tele) / 81.2°(Wide) to 22.6°(Tele)	
	Audio compression	No	
	Communication	No	
	Image Settings	AWB Adjustable Exposure Mode Sharpness, Saturation, Brightness & Contrast Adjustable Auto Gain Adjustable	
	BLC	Yes	
	Sense-Up	Yes (5 Levels)	
	WDR Range	Digital WDR	
	Noise Reduction	3D-DNR	
	Image Orientation	Mirror/Flip	
	Privacy Zone	Yes	
Compression	Motion Detection	Yes	
	Video Compression	H.264 Main Profile MJPEG/JPEG Baseline	
	Resolution	Main Stream: 1080P, 720P Sub-Stream: D1, CIF	
	Multi-stream	1920x1280 (1~30fps) 1280x720 (1~30fps) D1 (1~30fps) / CIF (1~30fps)	
	Bit rate	64Kbps ~ 8Mbps	
	Encode Mode	VBR/CBR	
Image Quality	Six levels under VBR; Free adjustment under CBR		

Network	Remote Monitoring	IE Browsing, CMS 3.x Control Software
	User Access	Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, RTP, RTSP, UPnP, SNMP, PPPoE, DNS, DDNS, SMTP, FTP, HTTP, IPv4, IPv6
	ONVIF	Yes
Pan/Tilt	Ethernet	100Mbps
	PoE	No
	Pan/Tilt Range	250° Pan / 65° Tilt
	Pan/Tilt Speed	Max Preset Speed: 12°/s Manual: 0.5°~12°/Sec (Proportional to Zoom)
Housing	Presets	255
	Patterns	4
	Cruise	4 Groups (Non-Configurable)
	Scan	Yes
Connectivity	Schedule	No
	IR Distance	50m
	Water-proof	IP66
	Wiper	No
Others	Fan & Heater	No
	Bracket	Wall Bracket
	Dimensions	225*175*94mm
	Weight(gross)	920gr
Connectivity	Network	RJ45
	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	No
Others	SD Card	No
	RS485	No
	Alarm	No
	Power Supply	12VDC/2A (Not supplied)
Work Environment	-20 C ~50 C, 10%~90% Humidity	

